



# Dynapac V5100TH-E


## Screeds

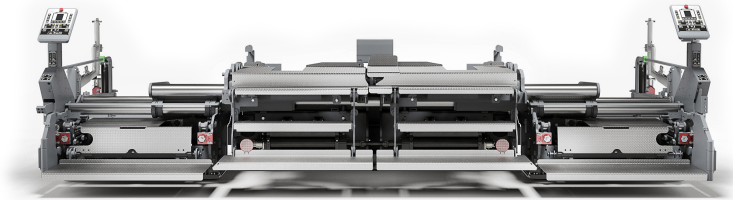


### Technical data


 <b>Masses</b>	
Mass (basic width)	3800 kg




  

 <b>Dimensions</b>	
Basic width	2.55 m
Working width, minimum (with reducing shoe)	2.05 m
Working width, hydraulic extendable	5.10 m
Working width, max.	8.10 m
Bottom plates thickness	300 mm

 <b>Heating</b>	
Heating system	Electric

 <b>Compaction</b>	
Compacting elements	Vertical impact tamper / Vibration
Crown profile	-2.5% to +4.5%
Tamper frequency	1500 rpm
Vibration frequency	3000 rpm
High Compaction Pressure Range	8 -70 Bar

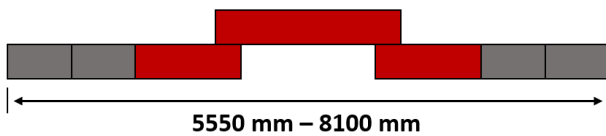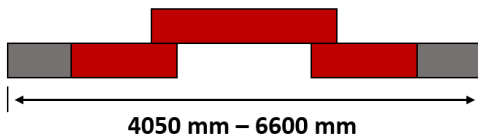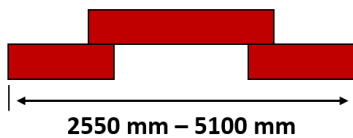

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.